

See discussions, stats, and author profiles for this publication at: <https://www.researchgate.net/publication/355982456>

Evaluation of the efficacy of engineered water nanostructures in inactivating airborne bacteria in poultry houses

Article in *Poultry Science* · November 2021

DOI: 10.1016/j.psj.2021.101580

CITATIONS

0

READS

17

8 authors, including:



Lifeng Zhang

University of Saskatchewan

69 PUBLICATIONS 786 CITATIONS

[SEE PROFILE](#)



Yingjie Yang

University of Saskatchewan

6 PUBLICATIONS 7 CITATIONS

[SEE PROFILE](#)



Myra Martel

University of Saskatchewan

13 PUBLICATIONS 117 CITATIONS

[SEE PROFILE](#)



Brooke Thompson

University of Saskatchewan

20 PUBLICATIONS 12 CITATIONS

[SEE PROFILE](#)

Some of the authors of this publication are also working on these related projects:



Electrostatics in powder handling processes [View project](#)



Using nano spray for indoor air quality control [View project](#)

Research Note: Evaluation of the efficacy of engineered water nanostructures in inactivating airborne bacteria in poultry houses

Jordan Si,^{*} Shelley Kirychuk ^{†,‡} Yingjie Yang,^{*} Myra Martel,^{*} Brooke Thompson,[‡] Lifeng Zhang ^{*,1}
Bernardo Predicala [§] and Huiqing Guo[¶]

^{*}Chemical and Biological Engineering, University of Saskatchewan, Saskatoon, Saskatchewan S7N 5A9, Canada;
[†]Department of Medicine, University of Saskatchewan, Saskatoon, Saskatchewan S7N 0X8, Canada; [‡]Canadian Centre for Health & Safety in Agriculture, University of Saskatchewan, Saskatoon, Saskatchewan S7N 2Z4, Canada;
[§]Prairie Swine Centre, Inc., Saskatoon, Saskatchewan S7H 5N9, Canada; and [¶]Mechanical Engineering, University of Saskatchewan, Saskatoon, Saskatchewan S7N 5A9, Canada

ABSTRACT Methods to control microbial contamination in confined livestock facilities are important to the health of both animals and workers. In addition, bacterial contamination is also a food safety issue. The most common disinfection technique employed in livestock facilities is the application of oxidizing agents (e.g., potassium peroxymonosulphate, chlorine, hydrogen peroxide, ozone). However, these techniques are associated with a number of limitations (e.g., toxicity, high cost, corrosiveness). Recently, engineered water nanostructures (**EWNS**) generated using an electrospray system was found effective in inactivating foodborne bacteria. Thus, this study investigated the efficacy of EWNS generated using a laboratory-scale electrospray system in inactivating bacteria found in poultry facilities. The

effects of various operating conditions (distance between the injector and grounded electrode of the electrospray system, applied voltage, liquid pH and conductivity, liquid flow rate, and treatment time) on the efficacy were also assessed. In these various experiments, airborne bacterial samples were collected from a pullet room using tryptic soy agar plates and then exposed to EWNS under varying conditions. After treatment, the plates were incubated at 37°C prior to colony counting. Reductions in bacterial concentrations up to 1.26 logs were obtained. The results indicate that the EWNS generated by the electrospray system can be a potential chemical-free alternative to conventional disinfection methods. Future tests will focus on scaling up the system for larger scale trials.

Key words: electrospray system, engineered water nanostructures, microbial inactivation, poultry house

2022 Poultry Science 101:101580

<https://doi.org/10.1016/j.psj.2021.101580>

INTRODUCTION

Microbial contamination in livestock facilities can have a devastating impact on the industry and on public health. Foodborne salmonellosis, for instance, which is commonly associated with consumption of poultry products (Hugas and Beloeil, 2014), was estimated to cause 93.8 million illnesses and 155,000 deaths worldwide each year based on the data collected from 1966–2007 (Majowicz et al., 2010). Thus, effective microbial decontamination is an important consideration in food production.

Current microbial decontamination techniques employed in livestock facilities include disinfection with oxidizing agents (e.g., potassium peroxymonosulphate (active ingredient in Virkon), chlorine, ozone, hydrogen peroxide) (Zhao et al., 2006), fogging with organic acids, spraying with slightly acidic electrolyzed water (Hao et al., 2013), and ultraviolet irradiation (Cossu et al., 2018). However, these techniques are associated with a number of limitations, such as high energy cost, toxicity on animals and humans, and potential damage of materials (Vaze et al., 2018). Recently, engineered water nanostructures (**EWNS**) have been reported for foodborne bacteria inactivation (Pyrgiotakis et al., 2016). EWNS are generated through a combined process of electrospray and ionization using an electrospray system, wherein a high electric field created between a metal capillary holding the water and a counter electrode causes the water droplet at the tip of the capillary to break into fine particles. The process

© 2021 The Authors. Published by Elsevier Inc. on behalf of Poultry Science Association Inc. This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>).

Received July 1, 2021.

Accepted October 24, 2021.

¹Corresponding author: lifeng.zhang@usask.ca

generates a large amount of reactive oxygen species (**ROS**) (e.g., hydroxyl and superoxide radicals) embedded in the droplets, which are responsible for the oxidizing and biocidal properties of the EWNS (Vaze et al., 2018). In contrast to electrolyzed water whose droplets are generally in micron range, the sizes of the EWNS droplets are in nanoscale (average diameter ~ 25 nm) (Pyrgiotakis et al., 2014); hence, they can be extremely mobile and remain airborne for hours. In addition, inhaled EWNS were found to be toxicologically benign (Pyrgiotakis et al., 2014), and the process leaves no chemical residues as it mainly uses water. A previous study obtained reductions up to 3.8 logs (99.98%) of foodborne bacteria after treatment with EWNS (Pyrgiotakis et al., 2016). However, although the EWNS have shown potential for microbial inactivation, they have not yet been tested on bacteria found in live-stock facilities.

Thus, this study aimed to investigate the efficacy of EWNS generated using a laboratory-scale electro-spray system in inactivating airborne bacteria in a poultry house and assess the effects of various operating conditions (distance between the injector and grounded electrode of the electro-spray system, applied voltage, liquid pH and conductivity, liquid flow rate, and treatment time) on the efficacy.

MATERIALS AND METHODS

Electrospray System

In this study, the electro-spray system consisted of a 30-G needle (Metal Hub, Fisher Scientific, Ottawa,

Ontario, Canada) with an inner diameter of 0.159 mm and an outer diameter of 0.311 mm, coupled to a 2.5 mL syringe (1000 series Gas Tight, Hamilton, Reno, NV). The size of the needle used was chosen based on the diameters of the droplets produced in a preliminary trial; needles with smaller diameter produced smaller size droplets. The liquid flow rate through the needle was controlled using a syringe pump (NE-1000, New Era Pump Systems Inc., Farmingdale, NY). As shown in Figure 1, the pump was mounted on top of a plexiglass chamber (35 cm \times 35 cm \times 35 cm). The needle was connected to a high voltage power supply (APM-30KIPNX, Kasuga Denki Inc., Japan). The counter electrode (5.9 cm in diameter and 0.1-cm thick, made of alumina) was grounded and positioned underneath the needle. The counter electrode was supported by an adjustable polyvinyl chloride (**PVC**) platform so that its distance from the tip of the needle could be varied.

Airborne Bacteria Collection and EWNS Treatment

Airborne bacterial samples were collected by exposing (passive sampling) tryptic soy agar (**TSA**) plates (DF0369176, BD Difco, Fisher Scientific, Ontario, Canada) to the air inside a pullet house of the Poultry Research and Teaching Unit of the University of Saskatchewan for five minutes. After sample collection, the agar plates were placed in a sterile Ziploc bags and brought to the laboratory. In each agar plate, a small portion of the agar (approximately 1.5 cm \times 1.5 cm)

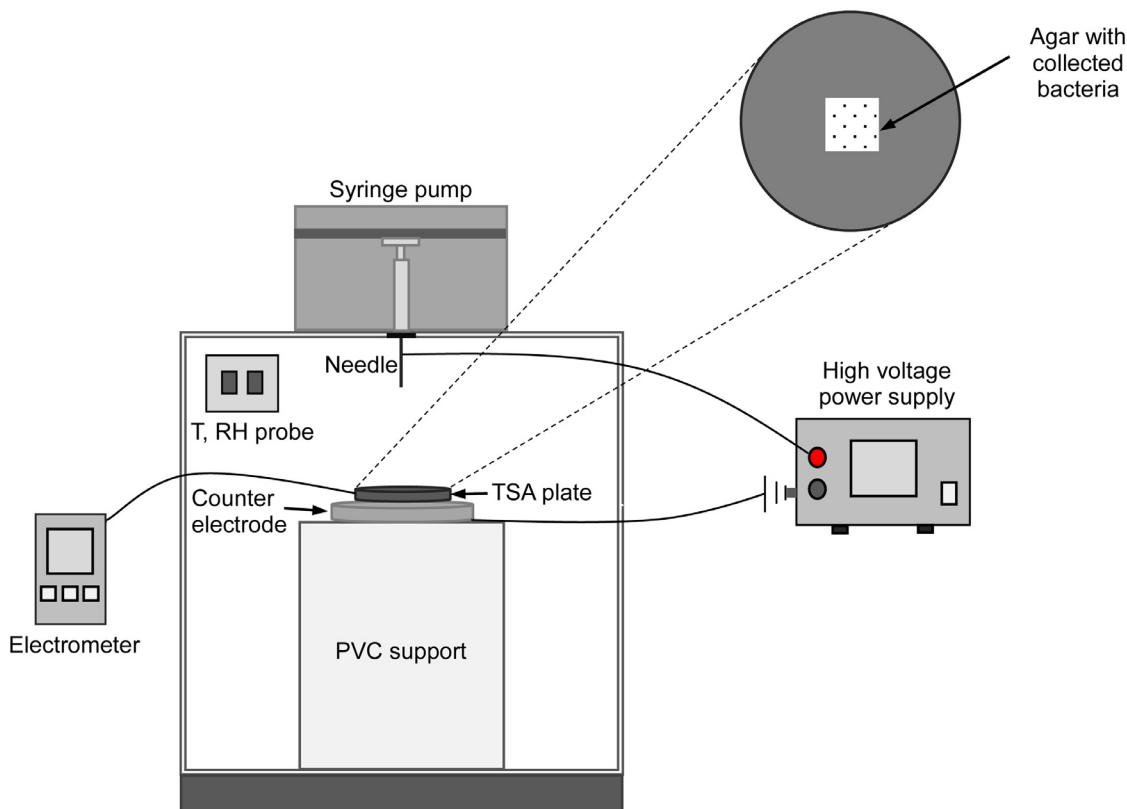


Figure 1. Schematic diagram of the experimental setup.

Table 1. Operating conditions evaluated and efficacy of the EWNS under each operating condition.

Parameter	Levels tested ^a	Mean log reduction \pm S.D. (log)	Mean percent reduction \pm S.D. (%)
Voltage (kV)	+6.6	0.68 \pm 0.08	78.8 \pm 3.8
	-6.6	0.72 \pm 0.15	79.6 \pm 7.8
	-7.6	1.12 \pm 0.25	91.5 \pm 4.2
Distance between needle tip and counter electrode (cm)	2	1.26 \pm 0.25	93.8 \pm 3.9
	3	0.68 \pm 0.16	77.9 \pm 8.1
	4	0.62 \pm 0.38	70.9 \pm 17.9
Liquid flow rate (μ L/min)	1	0.44 \pm 0.09	62.7 \pm 8.2
	2	0.72 \pm 0.15	79.6 \pm 7.8
	4	0.44 \pm 0.12	62.2 \pm 10.8
Conductivity (mS/cm)	0.06	0.69 \pm 0.07	79.2 \pm 5.4
	0.20	0.72 \pm 0.15	79.6 \pm 7.8
	14.72	0.94 \pm 0.20	87.9 \pm 5.4
pH	7.0	0.72 \pm 0.15	77.9 \pm 8.1
	8.5	1.13 \pm 0.24	91.7 \pm 3.6
	10.0	0.91 \pm 0.16	86.9 \pm 4.9
Treatment time (min)	15	0.46 \pm 0.06	65.4 \pm 10.1
	25	0.68 \pm 0.16	77.9 \pm 8.1
	35	0.84 \pm 0.08	85.5 \pm 2.6

^aBold numbers were the baseline operating parameters (parameters that were maintained, while the specific parameter to be evaluated was varied).

was cut and retained in the plate, while the other portion was discarded. The remaining agar in the plate was placed directly under the needle of the electrospray system for EWNS treatment at various operating conditions listed in Table 1. Milli-Q water (ultrapure water; MilliporeSigma, Ontario, Canada), reverse osmosis (RO) water, and saline water (0.1 g of NaCl in 75 mL RO water) were used to obtain liquids with conductivities of 0.06, 0.20, and 14.72 mS/cm, respectively. A liquid with a pH of 7.0 was obtained by using RO water, while those with pH of 8.5 and 10.0 were obtained by adding appropriate amount of NaOH to RO water. The effects of the operating parameters were evaluated by keeping the baseline operating conditions (the bold numbers in Table 1) constant, while the specific parameter to be evaluated was varied. For instance, in evaluating the influence of liquid flow rate, the flow rate was varied from 1 to 4 μ L/min, while the pH, conductivity, distance, and applied voltage were maintained at 7, 0.20 mS/cm, 3 cm, and -6.6 kV, respectively. For each condition, 6 agar plates were used: 3 served as treatment (exposed to the EWNS) and three served as control (not exposed to the EWNS or any water droplet). Further, each operating condition was performed in triplicate. After treatment, the treated agar plates were placed in an incubator (650D, Fisher Scientific, Canada) at 37°C for 8 h prior to colony counting. The mean chamber temperature and relative humidity during the entire trials were approximately 20°C and 25%, respectively.

Data and Statistical Analyses

The efficacy of the EWNS in inactivating the collected poultry barn bacteria under each operating condition was assessed using a modified log reduction equation described in Equation 1 and percent reduction equation described in Equation 2.

$$\log \text{ reduction} = \text{Abs} \left[\text{Log}_{10} \left(\frac{\frac{\text{CFU in } A_{\text{eff}}}{A_{\text{eff}}}}{\frac{\text{CFU in } A_{\text{control}}}{A_{\text{control}}}} \right) \right], \quad (1)$$

$$\% \text{ reduction} = \left[1 - \left(\frac{\frac{\text{CFU in } A_{\text{eff}}}{A_{\text{eff}}}}{\frac{\text{CFU in } A_{\text{control}}}{A_{\text{control}}}} \right) \right] \times 100, \quad (2)$$

Where A_{control} is the area of the control agar plate (approximately 225 mm²), A_{eff} is the effective area, which is the area in the treated agar covered with the nanodroplets, CFU in A_{eff} is the number of colony forming units (CFU) in the effective area, and CFU in A_{control} is the number of CFU in the control area. Depending on the operating condition, the effective area varied, which ranged from 5.1 mm² to 96.9 mm²; hence, modified log and percent reduction equations were used to consider this variation.

Analysis of variance (ANOVA) and Student's *t* test (SPSS v.26; IBM Corp., NY) were used to determine significant differences between the various operating conditions.

RESULTS AND DISCUSSION

The EWNS generated by the electrospray system developed in this study reduced the poultry barn bacteria by up to 1.26 logs or 94% (Table 1), which is higher than the 59% obtained by Hao et al. (2013) using slightly acidic electrolyzed water. Although the negative charging (-6.6 kV) resulted in relatively higher mean log reduction (0.72 log) than the positive charging (+6.6 kV), which resulted in 0.68 log, the difference was not significant ($P > 0.05$). However, the -7.6 kV applied voltage resulted in significantly higher log reduction ($P < 0.05$) than the -6.6 kV, indicating that increasing the applied voltage could result in higher inactivation, which could be attributed to enhanced ROS production at higher voltage levels.

The results show that increasing the distance between the needle tip and the counter electrode from 2 cm to 4 cm decreased the log reduction from 1.26 to 0.62; however, there was no significant difference ($P > 0.05$) between 3 cm (0.68 log) and 4 cm (0.62 log). A shorter distance between needle tip and counter electrode results

in higher current and more electrical charges due to higher electric field (Si et al., 2021), thus producing more ROS.

The 2 $\mu\text{L}/\text{min}$ liquid flow rate resulted in significantly higher log reduction (0.72 log) than the other 2 flow rates (1 and 4 $\mu\text{L}/\text{min}$) ($P < 0.05$). Si et al. (2021) found a higher *Escherichia coli* reduction on stainless steel coupons at 1 $\mu\text{L}/\text{min}$ than at 2 and 4 $\mu\text{L}/\text{min}$. The difference on the results could be due to the type of surfaces or the bacteria present.

There was no significant difference ($P > 0.05$) on the log reductions obtained from the three liquids (i.e., RO, Milli-Q, and saline water) with different conductivities at the range tested. The results also show that higher pH resulted in higher log reduction; however, no significant difference was observed between pH 8.5 and pH 10. Khan et al. (2018) found that higher liquid pH could result in higher ROS production. Moreover, longer exposure or treatment time resulted in higher bacterial inactivation as the bacteria experience more protein and DNA damage at longer exposure to EWNS (Vaze et al., 2018).

The results indicate that EWNS can deactivate common poultry barn bacteria. Moreover, the results could provide insights for larger scale evaluation of the efficacy of EWNS in decontaminating livestock facilities.

ACKNOWLEDGMENTS

Funding for this study came from the University of Saskatchewan, Ministry of Agriculture of Saskatchewan through the Agriculture Development Fund (ADF), and Agriculture and Agri-Food Canada through Agrivita Canada Inc.

DISCLOSURES

The authors declare that there is no conflict of interest.

REFERENCES

- Cossu, A., K. Huang, M. Cossu, R. Tikekar, and N. Nitin. 2018. Fog, phenolic acids and UV-A light irradiation: a new antimicrobial treatment for decontamination of fresh produce. *Food Microbiol* 76:204–208.
- Hao, X., B. Li, Q. Zhang, B. Lin, L. Ge, C. Wang, and W. Cao. 2013. Disinfection effectiveness of slightly acidic electrolysed water in swine barns. *J. Appl. Microbiol.* 115:703–710.
- Hugas, M., and P. A. Beloeil. 2014. Controlling *Salmonella* along the food chain in the European Union - progress over the last ten years. *Euro. Surveill.* 19 pii=20804.
- Khan, M., L. Philip, G. Cheung, S. Vadakepeedika, H. Grasemann, N. Sweezey, and N. Palaniyar. 2018. Regulating NETosis: increasing pH promotes NADPH oxidase-dependent NETosis. *Front. Med.* 13:19.
- Majowicz, S. E., J. Musto, E. Scallan, F. J. Angulo, M. Kirk, S. J. O'Brien, T. F. Jones, A. Fazil, and R. M. Hoekstra. 2010. The global burden of nontyphoidal *Salmonella* gastroenteritis. *Clin. Infect. Dis.* 50:882–889.
- Pyrgiotakis, G., J. McDevitt, A. Bordini, E. Diaz, R. Molina, C. Watson, G. Deloid, Y. Mizuyama, J. Brain, and P. Demokritou. 2014. A chemical free, nanotechnology-based method for airborne bacterial inactivation using engineered water nanostructures. *Environ. Sci. Nano.* 2014:15–26.
- Pyrgiotakis, G., P. Vedantam, C. Cireza, J. McDevitt, M. Eleftheriadou, S. Leonard, and P. Demokritou. 2016. Optimization of a nanotechnology based antimicrobial platform for food safety applications using engineered water nanostructures (EWNS). *Sci. Rep.* 6:23–48.
- Si, Y., Y. Yang, M. Martel, T. Brooke, B. Predicala, H. Guo, L. Zhang, and S. Kirychuk. 2021. Effects of operating parameters on the efficacy of engineered water nanostructures (EWNS) in inactivating *Escherichia coli* on stainless-steel surfaces. *Trans. ASABE.* 64:1913–1920.
- Vaze, N., Y. Jiang, L. Mena, Y. Zhang, D. Bello, S. Leonard, A. Morris, M. Eleftheriadou, G. Pyrgiotakis, and P. Demokritou. 2018. An integrated electrolysis-electrospray-ionization antimicrobial platform using engineered water nanostructures (EWNS) for food safety applications. *Food Control* 85:151–160.
- Zhao, T., P. Zhao, J. W. West, J. K. Bernard, H. J. Cross, and M. P. Doyle. 2006. Inactivation of enterohemorrhagic *Escherichia coli* in rumen content- or feces-contaminated drinking water for cattle. *Appl. Environ. Microbiol.* 72:3268–3273.